


opcjonalnie w komplecie: / optional included:



wejście  $\mu$ USB /  $\mu$ USB in:

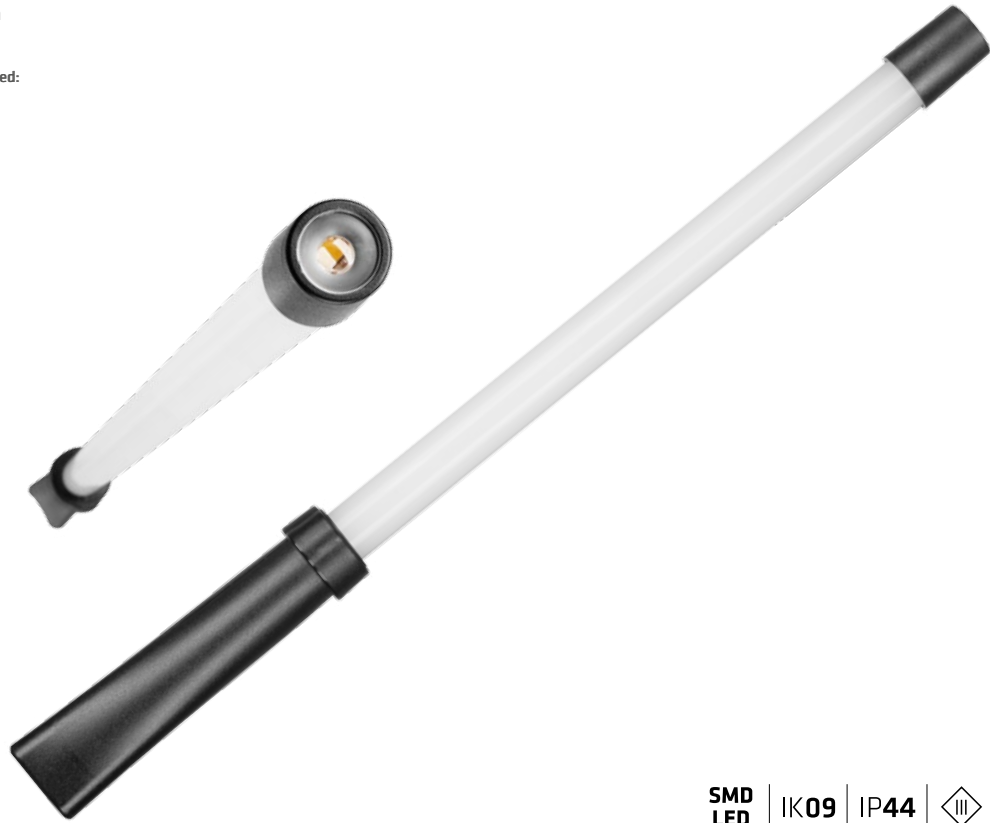

SMD LED | IK09 | IP44 | III | CE | T

LED GO!



TORCHLIGHT  
FUNKCJA LATARKI



IMPACT RESISTANT  
UDERZENIOODPORNOŚĆ



Li-ion  
BATTERY  
AKUMULATOR

IP44

SPLASH-PROOF  
BRZGODOPORNOŚĆ



PAGE 60  
STRONA 60  
ACCESSORIES  
AKCESORIA

- Moc: 4W (boczna), 1W (górna)
- Źródło światła: SMD LED (boczna), dioda CREE (górna)
- Klosz matowy wykonany z polycarbonatu
- Gryf i kapa wykonane z ABS
- Stopień szczelności: IP44
- Waga: 0,5kg
- Zasilacz  $\mu$ USB 230V / 5V 1000mA (w opcji)
- Akumulator: Li-Ion 3,7V 2200mA
- Czas ładowania: 4h
- Czas świecenia: 4h
- Wyłącznik w ręczce
- Możliwość dokupienia i wymiany podzespołów

- Power: 4W (main part), 1W (torchlight)
- Light source: SMD LED (main part), CREE LED (torchlight)
- High ingress protection class IP44
- Polycarbonate diffuser
- Handle and cap made of ABS
- On/off switch in the handle
- Charger  $\mu$ USB 230V / 5V 1000mA (optional)
- Li-Ion 3,7V 2200mA battery
- Charging time: 4h
- Working time: 4h
- Weight: 0,5kg
- Spare parts available

index	nazwa article	kl.ochronności protection class
378218	PROFI SLIM LED DUO 5W z zasilaczem $\mu$ USB / with $\mu$ USB charger	III
378133	PROFI SLIM DUO LED 5W	III