



TREGO VFP 500

PNEUMATIC VALVE SPRING PRESS

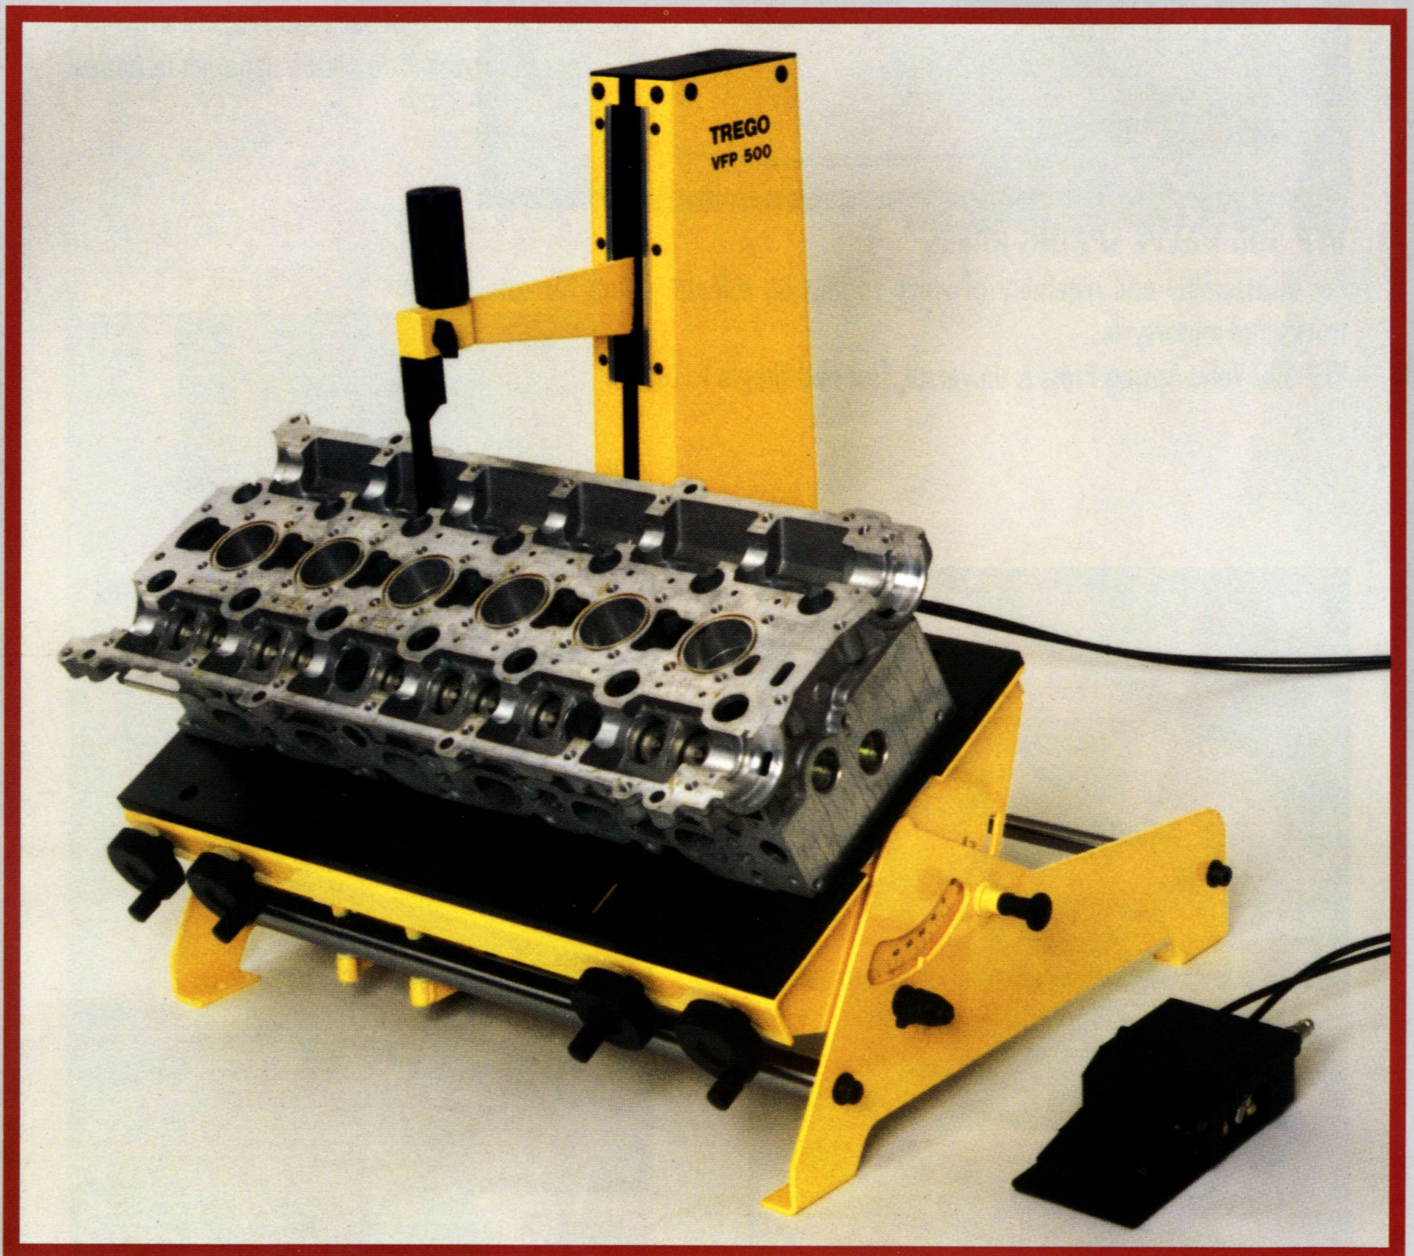


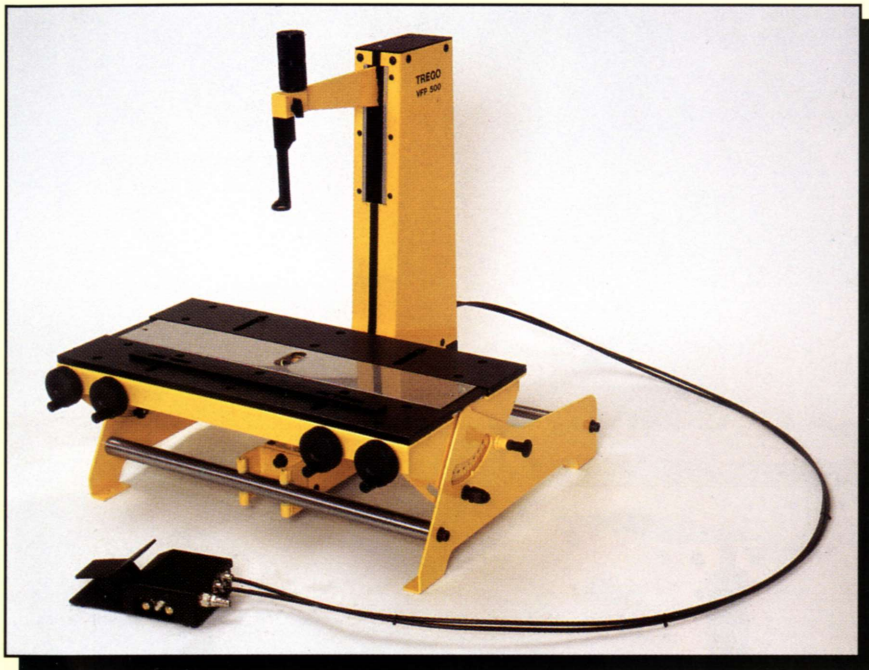


VFP 500 VALVE SPRING PRESS

For disassembly and assembly of valve springs on cylinder heads for cars, trucks and motorcycles.


VFP 500 Valve Spring Press is universal, fast and simple to use.

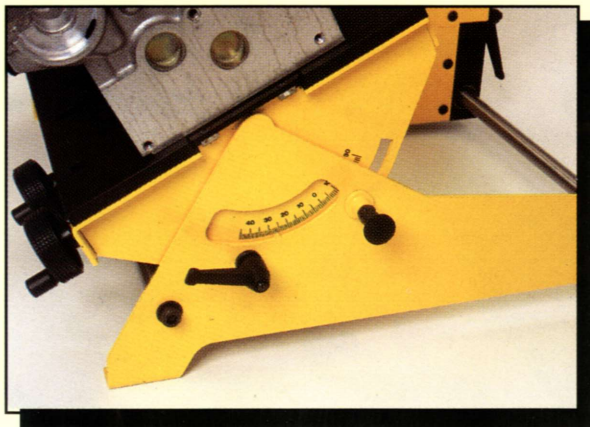




The table is adjustable 45° to the front and 30° to the back side.

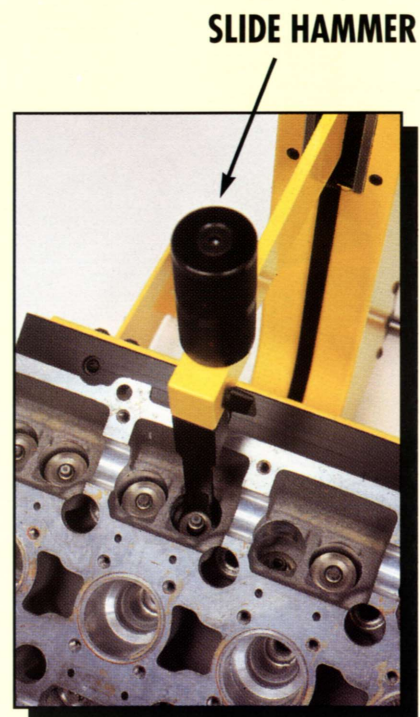


Valve spring compressed.

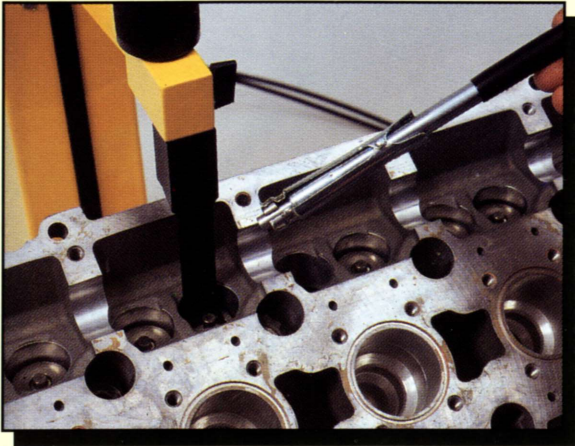

The valve keepers are easy to remove and replace, thanks to the open design of the pressure foot.

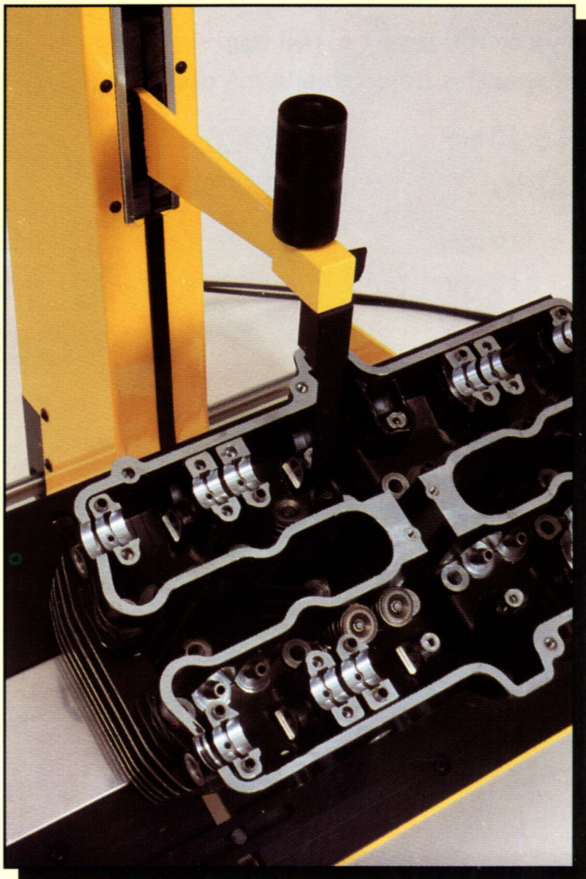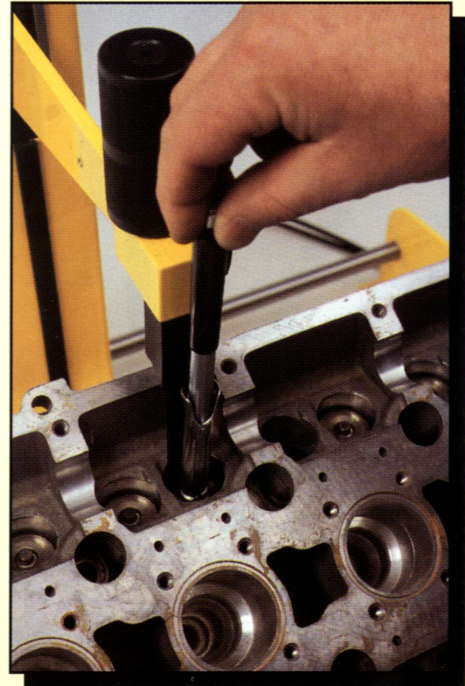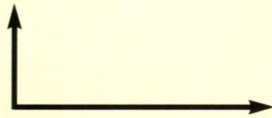

A smaller pressure foot is available for MC-heads.

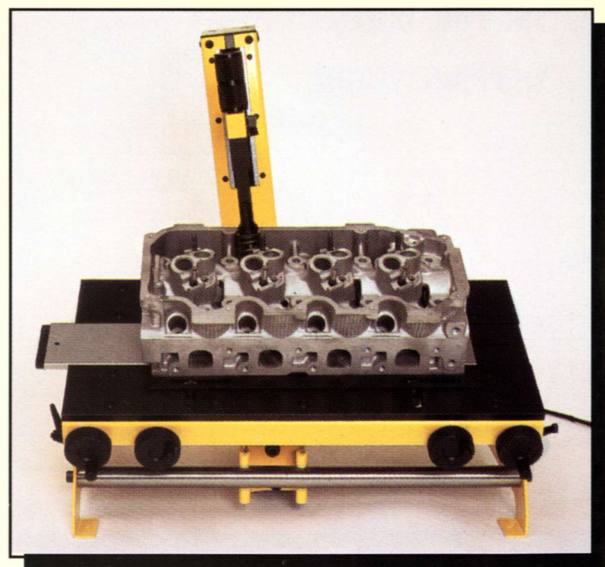

The post is adjustable 0° to 25° to both sides.


EXTRA ACCESSORIES:

Standard pressure foot



52-091-28
ø 28 mm

Small and large pressure foot
as optional accessories

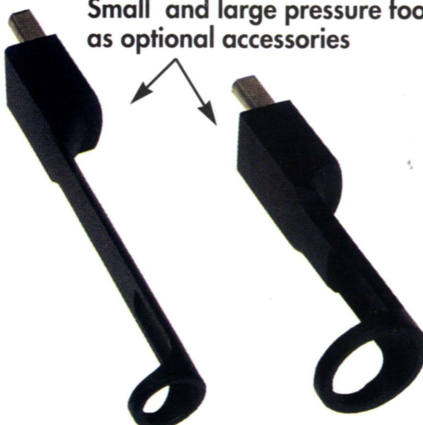

52-091-23
ø 23 mm

52-091-35
ø 35 mm



Valve Keeper Installer
52-300-5 for 5 mm valves
52-300-6 for 6 mm valves
52-300-8 for 7-8 mm valves

SPECIFICATIONS

TABLE DIMENSIONS:

630 x 310 mm

PRESS ARM MOVEMENT:

x = 500 mm, z = 140 mm

z-movement controlled by a foot operated pedal. The speed is adjustable in the pedal.

AIR PRESSURE:

6-10 bar

OVERALL DIMENSIONS:

Length:

710 mm

Width:

610 mm

Height:

660 mm

Net Weight:

45 kg

SHIPPING DIMENSIONS:

800 x 600 x 620 mm

SHIPPING WEIGHT:

65 kg

Member



YOUR DISTRIBUTOR:



TREGO MASKIN AB

Rattgatan 6

S-827 35 LJUSDAL, SWEDEN

Tel: +46 651 124 60


Fax: +46 651 159 65

VALVE STEM SEAL EXTRACTOR

For fast and easy
removal of even
the stubborn valve
stem seals.

For all known
seal dimensions.

Part no. 52-320

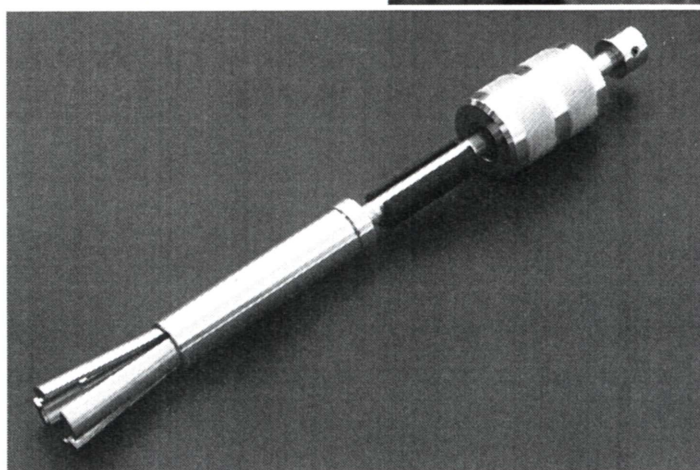

TREGO MASKIN AB

Rattgatan 6 S-827 35 LJUSDAL SWEDEN Tel. +46 651 124 60 Fax +46 651 159 65