

TREGO VFP 50

MANUAL VALVE SPRING PRESS

*Fast and easy
disassembly
and assembly
of valve springs*



TREGO MASKIN AB

Part no: 52-VFP50

TREGO VFP 50

MANUAL VALVE SPRING PRESS

VFP 50 is developed for disassembly and assembly of valve springs on cylinder heads for cars, trucks and motorcycles.

Slide hammer



Adjustable stop collar



Y-axis adjustment and locking of C-frame



The C-frame is adjustable 25° to both sides for canted valves



Easily adjustable fixture for fast positioning of the cylinder head.

The angle of the head support is adjustable from 0 - 45°



Specifications:

Movement (C frame)

Horizontal: 490 mm
Vertical: 84 mm
Piston movement: 165 mm

Mesurments

Width: 670 mm
Depth: 560 mm
Height: 880 mm

Weight: 14 kg


Shipping Dimensions

600 x 570 x 115 mm, 16 kg

Optional Tools:



The keepers are easy to remove with the valve keeper magnet.

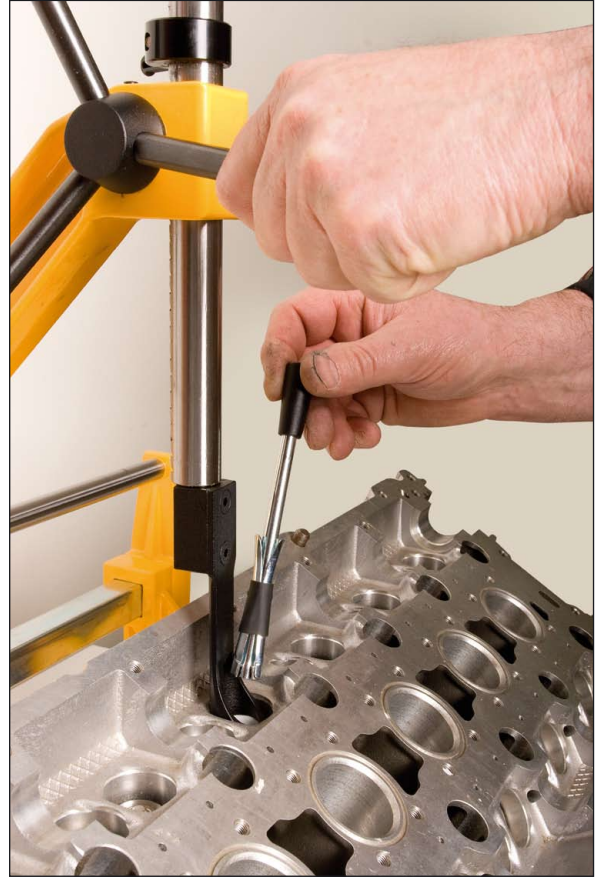

Installation of keeper is fast and easy with the keeper installer thanks to the open design of the pressure foot.



Valve clearance pressure foot and stop collar. For valve clearance adjustment without to install cam shaft bearing caps.

TREGO VFP 50

MANUAL VALVE SPRING PRESS

Standard pressure foot

(Included)



28 mm
52-091-28

Optional pressure feet

(Optional)



18 mm
52-091-18

23 mm
52-091-23

35 mm
52-091-35

Valve keeper installer and magnet (Optional)



4 mm
52-300-4

5 mm
52-300-5

6 mm
52-300-6

7 mm
52-300-7

8 mm
52-300-8

Magnet
52-300

Valve clearance pressure foot with stop collar

(Optional)



52-091-F

Distributed by:



TREGO MASKIN AB

RATTGATAN 6, SE-827 35 LJUSDAL, SWEDEN • TEL:+46 651 124 60
INFO@TREGOMASKIN.SE • WWW.TREGOMASKIN.SE