

Quick Start Guide

Product Profile


As a stylish Android-based diagnostic tool, CRP MOT III features powerful functions and test result accuracy through its advanced diagnosing technology and wide range of vehicle models coverage.

With simple wireless (BT) communication, the product has achieved full car model and full system vehicle trouble diagnosis. In addition, it supports one-click software update, various resetting operations and WLAN and USB connection.

The diagnostic system has two major parts: Display tablet and Vehicle Communication Interface (VCI) connector. The following illustration explains how the display tablet works with the VCI connector.

VCI Connector


(Works as the vehicle communication interface device for accessing the vehicle data.)



To Vehicle's DLC





(For details on how to connect, please refer to Section 4 "Preparation & Connection".)

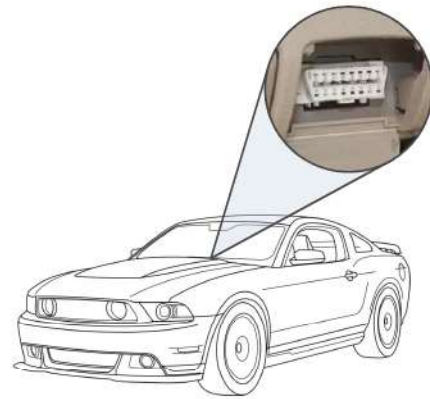


Vehicle

(Sending the vehicle data to the tablet)

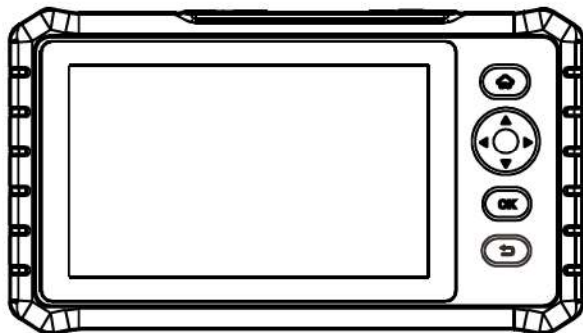

Display Tablet

(Works as the central processor and monitor for analyzing vehicle data and indicating the test result.)




Internet

To proceed with one of the following operations, you need to establish network connection (See Section 2 "Network Setup" for details):



- Register & activate the tool
- Update the diagnostic software & APK
- Surf the Internet

VCI Connector

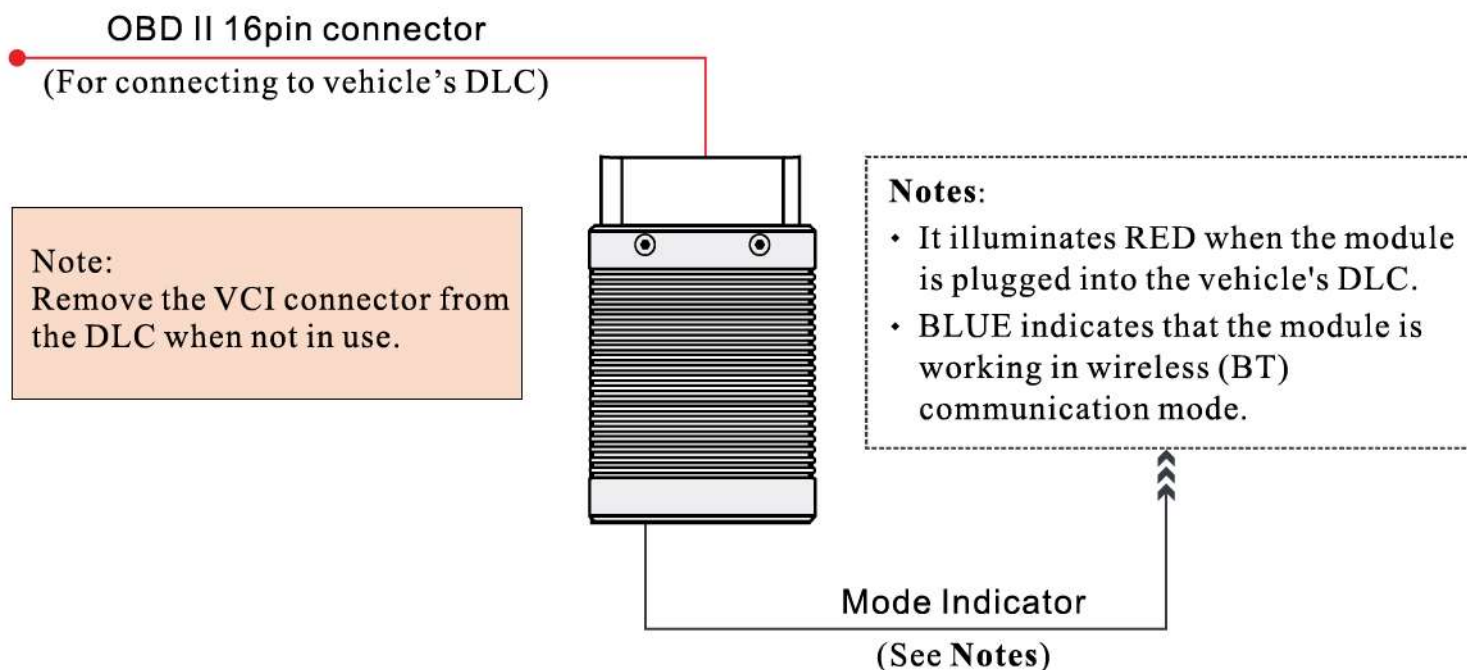The VCI connector only applies to passenger vehicles (with a 12 V DLC). You can install the VCI on the OBD II vehicle's Data Link Connector (DLC) directly or via the extension cable.



1. Charging & Turning On

1. Connect the power adaptor to the charging port of the tool.
2. If the tool is being charged, a charging indicator displays . Once the indicator turns , the battery is fully charged.
3. Pressing the POWER button will start the tool and enter the home screen.

Notes:

If your tool does not respond after you press the Power button, the battery may have run out. Charge for 5 minutes and then power it on.

Use the standard power adaptor supplied with the tool. The company shall have no liability for any damage or loss resulting from using non-standard power adaptors.

2. Network Setup

To configure your access to the internet, follow the steps below:

1. Tap **Settings > WLAN**.
2. Slide the WLAN switch to **ON**, the system starts searching for available WLAN networks.
3. Select a wireless network. The tablet connects with a previous connected network automatically; in case of a new network when the selected network is encrypted, enter the password to get connected.
4. When **Connected** appears, it indicates the tablet is properly connected to the Internet.

*Notes: When WLAN is not required, you can disable this function to conserve battery power.

3. Register & Update


1. **Open App:** Tap the application icon.

Tap **Login** on the right upper corner of the screen.


a. For initial use, tap **New registration** to open a sign-up page, refer to steps 2 to 4.

b. If you have an account, tap **Login**.


c. If you forgot the password, tap **Retrieve password** to retrieve it.

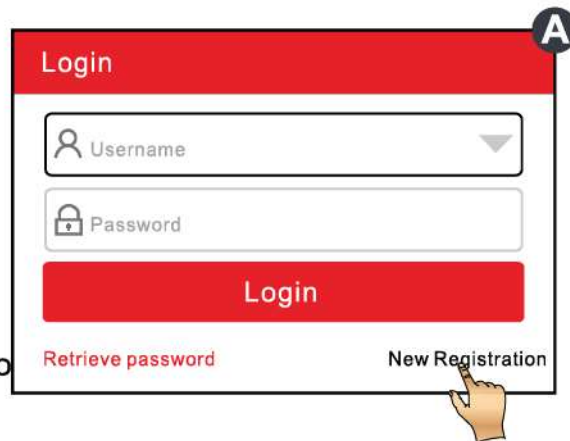

2. **Create Account:** In Fig. B, fill in each field and tap **Register** to go to step 3. (Note: To obtain more capabilities and better service, please enter the real information.)

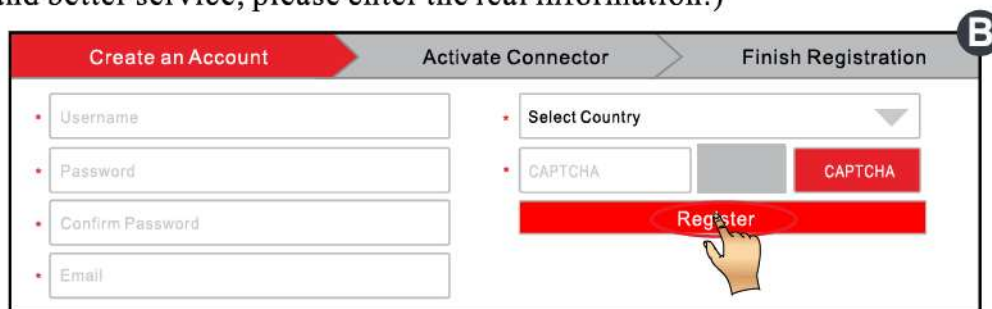

3. **Activate VCI Connector:** In Fig. C, input the Product S/N and Activation Code (can be obtained from the password envelope), and then tap **Activate**.

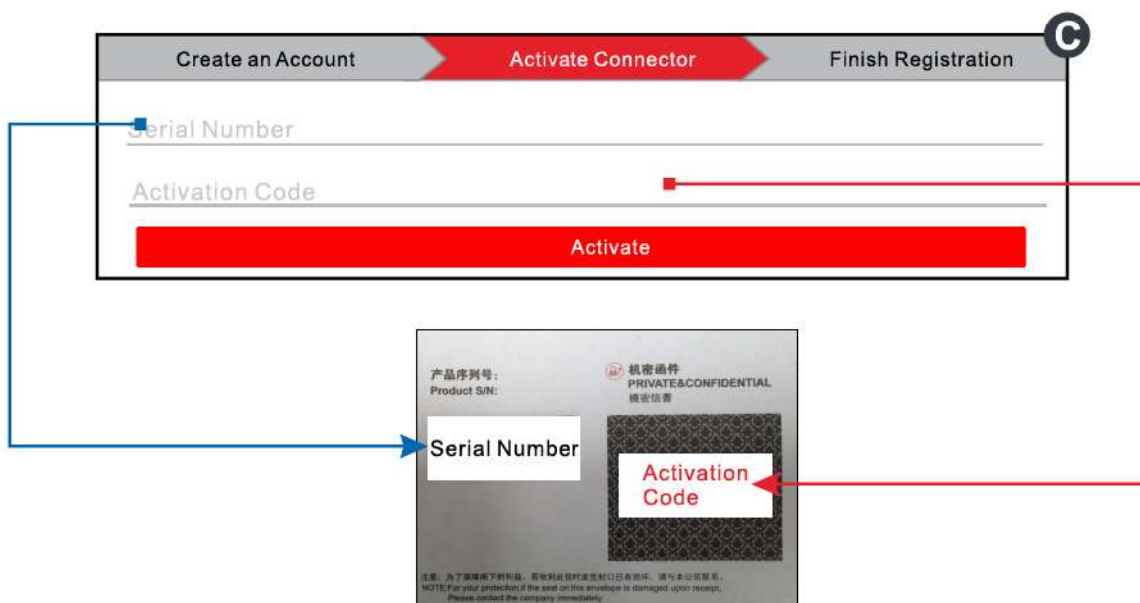

4. **Update Diagnostic Software:** Tap **Yes** in Fig. D to enter diagnostic software download screen (Note: To download the software later, tap **No**. In this case, tap **Software Upgrade** on the function menu to download it.).

Tap **Update** to download and install the diagnostic software.




4. Preparation & Connection

1. Preparation

- 1) Switch the ignition on.
- 2) The vehicle battery voltage should be 9 to 18 V.
- 3) Throttle should be in a closed position.

2. Locate vehicle's DLC

The DLC provides standard 16 pins and is generally located on driver's side, about 12 inch away from the center of dashboard. See Figure **DLC Location**. If DLC is not equipped under dashboard, a label indicating its position will be given. In case no DLC is found, please refer to Automobile Repair Manual.

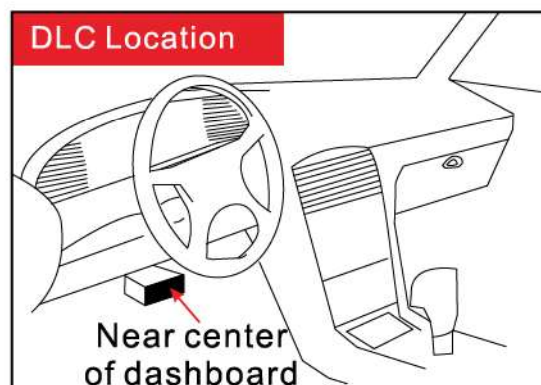


3. Connection

Select the desired diagnostic connector according to the vehicle DLC type and then follow the steps below to proceed:

1. For vehicles equipped with an OBD II management system, plug the VCI connector into the vehicle's DLC directly or use the OBD II extension cable to connect the VCI connector and the DLC.
2. For vehicles not equipped with an OBD II management system, do the following:
 - 1). Select the corresponding non-16pin connector.
 - 2). Plug the non-16pin end of the connector into the DLC socket, then connect the other end to the OBD I adaptor, and then tighten the captive screws.
 - 3). Connect the other end of the adaptor to the VCI connector.

5. Preparation & Connection

For new users, follow the operation chart below to start using this tool.

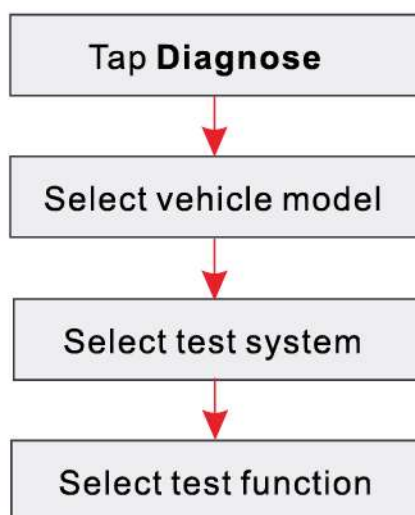

*Notes:

1. Before you start, make sure that you have activated the VCI connector and downloaded the diagnostic software in advance. For details, refer to Section 3 in this Quick Start Guide.
2. To make the best of our services, you are recommended to keep your software updated.