



HD 7/18 C

The device is designed to work in cleaning garages, trade, commerce, small businesses, companies and cleaning services, and on farms.



1 Saves energy and time: high-pressure gun EASY! Force equipment mounting system EASY! Lock

- Working without fatigue: high pressure gun EASY! Force
- The mounting accessories EASY! Lock: tough and durable.

2 Handles on the equipment housing

- The ability to store a nozzle on the device.
- The power cord can be stored safely on the back of the device (a special handle).

3 telescopic Handler

- Thanks to profiles formed from aluminum and the device is stable and easy to maneuver.
- Storage of accessories ready to use.

4 high mobility

- Convenient transportation device.
- Compact dimensions.


HD 7/18 C

- 3-phase motor: strong and durable
- Servo Control: ring allows time adjustment of water flow directly on the gun
- Rotating spray lance stainless steel


Technical data

| | | |
|---|------------|-----------------|
| catalog number | | 1.151-900.0 |
| | | 4054278164748 |
| Power | ~ / V / Hz | 3/400/50 |
| Flow rate | l / h | 240-700 |
| working pressure | bar / MPa | 20-175 / 2-17,5 |
| maximum pressure | bar / MPa | 215 / 21.5 |
| The maximum temperature of the incoming water | ° c | 60 |
| power connections | kW | 4.7 |
| Weight | kg | 30.9 |
| Dimensions (length. X w. X H). | mm | 360 × 375 × 925 |

Standard equipment

| | | |
|---|----|-------------|
| gun | | EASY! Force |
| High-pressure hose | m | 10 |
| lance | mm | 840 |
| Triple nozzle (0 ° / 25 ° / 40 °) | | Manually |
| ANTI! Twist | | - |
| Automatic reduction of pressure when switched off | | • |
| Servo Control | | • |

- The scope of supply.

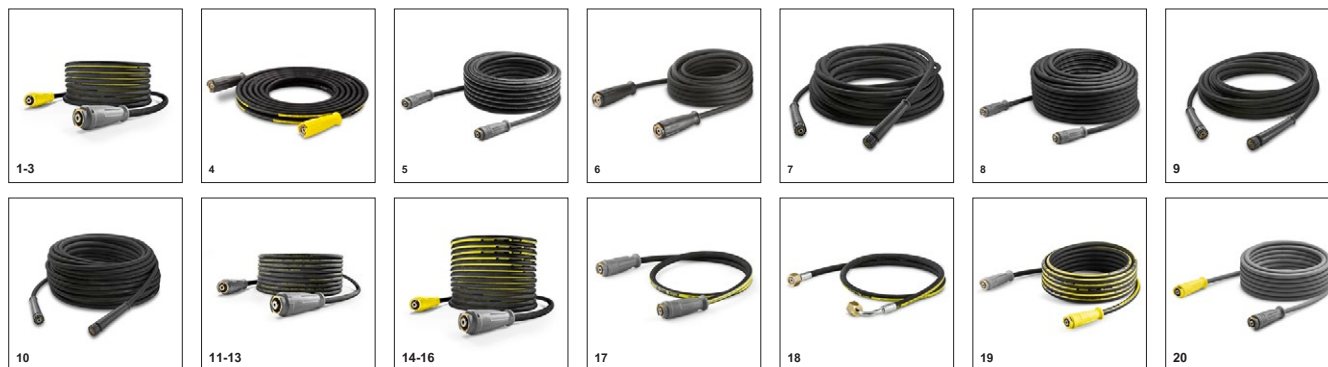


| | catalog number | Nominal | Operating pressure max. | Length | Price | Description | |
|--|----------------|---------|-------------------------|--------|-------|--|---|
| Standard connector on both sides | | | | | | | |
| The high pressure hose, a standard, ID 8, 10 m | 1 6.110-031.0 | ID 8 | 315 bar | 10 m | | With patented AVS connection with the gun (rotating) and manual tightening. M 22 x 1.5 secured against bending. ID 8/155 ° C / 315 bar. | • |
| The high pressure hose, a standard, ID 8, 15 m | 2 6.110-030.0 | ID 8 | 315 bar | 15 m | | | • |
| The high pressure hose, a standard, ID 8, 20 m | 3 6.110-032.0 | ID 8 | 315 bar | 20 m | | | • |
| Rotary hose DN 8 | 4 6.110-014.0 | ID 8 | 315 bar | 30 m | | | • |
| Standard hose High-pressure, 10 ID, 15 m | 5 6.110-042.0 | ID 10 | 220 bar | 15 m | | With mutual screw connection 2 x 2 mx 1.5 and kink protection. 15 m, ID 10/155 ° C / 220 bar. | • |
| High pressure hose standard, 10 ID, 20 m, mutual screw connection | 6 6.110-043.0 | ID 10 | 220 bar | 20 m | | | • |
| The high pressure hose, a standard, ID 10, 25 m, mutual screw connection | 7 6.110-044.0 | ID 10 | 220 bar | 25 m | | | • |
| Hose line DN10 premium 22MPa 40m | 8 6.110-045.0 | ID 10 | 220 bar | 40 m | | | • |
| Hose line DN12 premium 21MPa 15m | 9 6.110-059.0 | ID 12 | 210 bar | 15 m | | | • |
| Hose line DN12 premium 21MPa 40m | 10 6.110-060.0 | ID 12 | 210 bar | 40 m | | | • |
| Standard high-pressure hose 10 m | 11 6.110-034.0 | ID 6 | 250 bar | 10 m | | With patented AVS connection with the gun (current) and manual tightening. M 22 x 1.5 secured against bending. ID 6/155 ° C / 250 bar | • |
| | 12 6.110-035.0 | ID 6 | 250 bar | 10 m | | | • |
| HP hose, 10 m DN 6, 300 bar, with AVS connection | 13 6.110-056.0 | ID 6 | 300 bar | 10 m | | Hoses standard with patented AVS connection (rotating) the gun and manual tightening. M 22 x 1.5 secured against bending. ID 6/300 bar / 10 m. | • |
| Hoses Longlife 400 with bilateral swivel | | | | | | | |
| High-pressure hose Longlife 400, swivel, ID 8, 30 m | 14 6.110-023.0 | ID 8 | 400 bar | 30 m | | In the swivel joint, 2 x M 22 x 1.5. ID 8/155 ° C / 400 bar. | • |
| High-pressure hose Longlife 400, swivel, ID 8, 20 m | 15 6.110-027.0 | ID 8 | 400 bar | 20 m | | | • |
| High-pressure hose Longlife 400, ID8, 15 m | 16 6.110-029.0 | ID 8 | 400 bar | 15 m | | In the swivel joint, 2 M 22 x 1.5 x 15 m, ID 8/155 ° C / 400 bar. | • |
| High-pressure hose Longlife 400, mutual screw connection, ID 8, 1.5 m | 17 6.110-024.0 | ID 8 | 400 bar | 1.5 m | | With mutual screw connection M 22 x 1.5 and kink protection. ID 8/155 ° C / 400 bar. | • |
| | 18 6.110-069.0 | ID 8 | 400 bar | 1.5 m | | | • |
| High-pressure hose Longlife 400, ID 8, 10 m, with swivel gun AVS | 19 6.110-038.0 | ID 8 | 400 bar | 10 m | | With patented AVS connection with the gun (obrotowolozyskowe) highly resistant to stretching. 10 m, ID 8/155 ° C / 400 bar. | • |
| Hoses for the food industry with double-sided connector | | | | | | | |
| High pressure hose, mutual screw connection, ID 8, 10 m - version for the food industry | 20 6.110-051.0 | ID 8 | 250 bar | 10 m | | In the mutual screw connection 2 x 22 x 1.5 M of kink protection and a swivel joint, not dyed. ID 8/155 ° C / 250 bar. | • |
| High pressure hose, mutual screw connection, ID 8, 20 m - version for the food industry | 21 6.110-052.0 | ID 8 | 250 bar | 20 m | | | • |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C


1.151-900.0

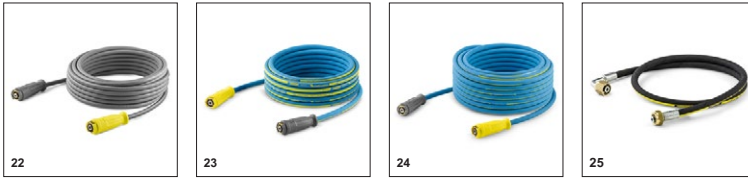

| | | catalog number | Nominal | Operating pressure max. | Length | Price | Description | |
|---|-------|----------------|---------|-------------------------|--------|-------|--|---|
| High-pressure hose, ID 6, 15 meters - version for the food industry | 22 6. | 110-063.0 | ID 6 | 250 bar | 15 m | | Version for the food industry. AVS gun connection, gray, not dyed. ID 6/155 ° C / 250 bar. | • |
| Longlife hoses for the food industry with double-sided connector | | | | | | | | |
| High-pressure hose Longlife 10 m - version for the food industry | 23 6. | 110-053.0 | ID 8 | 400 bar | 10 m | | With 2 double-sided screw connection M 22 x 1.5. The outer shell resistant to animal fats, does not stain. 10 m, ID 8/155 ° C / 400 bar. | • |
| High-pressure hose Longlife - version for the food industry, 15 m | 24 6. | 110-054.0 | ID 8 | 400 bar | 20 m | | High-pressure hose Longlife - version for the food industry, 15 m. With patented AVS connection in the trigger gun. The outer shell resistant to animal fats, does not stain. ID 8/155 ° C / 400 bar | • |
| special Hoses | | | | | | | | |
| Special high-pressure hose, 1.5 m | 25 6. | 110-068.0 | ID 8 | 400 bar | 1.5 m | | With rugged connector 2 x M 22 x 1.5 connection and angled to one side. ID 8/155 ° C / 400 bar. | • |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0

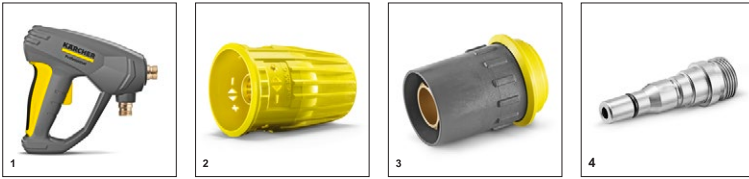

| | catalog number | Flow rate | | | | | Price | Description | |
|---|----------------|-------------|--|--|--|--|-------|--|---|
| High pressure guns | | | | | | | | | |
| Gun EASY! Advanced Force | 1.4.118-005.0 | | | | | | | EASY gun! Uses the recoil force of high pressure water to minimize the force required to maintain the trigger depressed to zero! | • |
| Servo Control | | | | | | | | | |
| Servo Control | 2.4.118-007.0 | 0-750 l / h | | | | | | It allows you to adjust water flow directly on the gun. Water flow 0-750 l / h. | • |
| Quick connect | | | | | | | | | |
| Quick connector coupling trapezoidal thread | 3.2.115-000.0 | | | | | | | | • |
| Quick connector plug nipple thread tra | 4.2.115-001.0 | | | | | | | | • |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | catalog number | Operating pressure max. | nozzle size | | | Price | Description |
|--|----------------|-------------------------|-------------|--|--|-------|---|
| three-stage nozzles | | | | | | | |
| Triple nozzle size 40 | 1.4.117-033.0 | 300 bar | 40 | | | | Fast and convenient switching stream nozzle. The choice between a high pressure jet point (0 °), the flat (25 °) and the low-pressure flat-spray (40 °). For devices with low-pressure flat jet injector is used to suck and applying cleaning agent. Connector M 18 x 1.5. |
| Rotational nozzles, a small | | | | | | | |
| Dirt Blaster complete only for Replaceme | 2.4.114-020.0 | 180 bar | 40 | | | | |
| Rotary nozzle, large | | | | | | | |
| Rotary nozzle / 40 unswitched " | 3.4.114-041.0 | 300 bar | 40 | | | | Rotating pencil jet increases the yield as much as 10-fold (ceramic insert provides high durability) max. 300 bar / 30 bar, 85 ° C. |

- The scope of supply.
- Available accessories.
- Extension hose.

1.151-900.0



| | catalog number | Operating pressure max. | Length | Price | Description |
|---|----------------|-------------------------|---------|-------|--|
| Rotating spray lances | | | | | |
| Rotary lance 850 mm | 1 4.112-006.0 | 300 bar | 840 mm | | Rotary lance stainless steel with hand screw connection. Ergonomically shaped handle for optimum convenience and isolation. Rotated at a pressure of about 360°. Length of 850 mm. |
| nozzle light | 2 2.680-002.0 | | 125 mm | | |
| Lance 250 mm | 3 4.112-027.0 | 300 bar | 250 mm | | |
| Lance 550 mm | 4 4.112-024.0 | 300 bar | 400 mm | | |
| Rotation lance 600 mm | 5 4.112-007.0 | 300 bar | 600 mm | | Rotary lance stainless steel with hand screw connection. The ergonomically shaped handle ensures optimum convenience and isolation. Rotated at a pressure of about 360°. Length 600 mm. |
| Rotary lance 1050 mm | 6 4.112-000.0 | 300 bar | 1050 mm | | Rotary lance stainless steel with hand screw connection. The ergonomically shaped handle ensures optimum convenience and isolation. Rotated at a pressure of about 360°. Length 1050 mm. |
| Lance, rotatable, 1550 mm | 7 4.112-018.0 | 300 bar | 1550 mm | | Lanka in various sizes and versions, stainless steel with hand screw connection. Ergonomically shaped handles for optimum comfort and proper insulation. |
| Lance, 2050 mm Rotation | 8 4.112-021.0 | 300 bar | 2050 mm | | |
| Extension tube streaming TR 1000 | 9 4.112-048.0 | 300 bar | 1000 mm | | |
| lance angle | | | | | |
| Lance WC and gutter 10 4.112-029.0 | | | | | With nozzle. Special shape for the hygienic cleaning of toilets and gutters (stainless steel). |
| Flexible lance | | | | | |
| Flexible lance 1050mm | 11 4.112-035.0 | 210 bar | 1050 mm | | |
| Joint wyboczeniowy TR 20 | 12 4.112-057.0 | 300 bar | | | |
| telescopic lance | | | | | |
| Telescopic lance jet | 13 4.112-037.0 | 225 bar | 5400 mm | | Infinitely extendable length from 1.8 m to 5.4 m. Wand (eg. Ceilings, facades). Gun with integrated high-pressure join M 22 x 1.5. Sign nozzles M 18 x 1.5. |
| Belt easy to work with telescopic lance jet | 14 6.373-987.0 | | | | Belt for greater convenience when working with telescopic lance jet. Weight lance równiemiernie is distributed on the arm and thus it can work longer. |
| gutter cleaning | | | | | |
| Lance cleaning gutters | 15 2.112-015.0 | | 960 mm | | Lance designed for cleaning gutter systems. The special shape of the lance and nozzle umożliwiają cleaning the gutters without having to remove the lid and cover. |
| Lance Underbody | | | | | |
| Lance Underbody | 16 4.112-032.0 | | 700 mm | | For effective and convenient cleaning of vehicle chassis and fenders (stainless steel) without HP nozzle. Length of 700 mm. |
| Zusatzhandgriff | | | | | |
| | 17 4.321-380.0 | | | | |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | catalog number | | | | | Price | Description | |
|----------------------|----------------|--|--|--|--|-------|---|---|
| Y distributor | | | | | | | | |
| Y-piece | 1.4.111-024.0 | | | | | | It allows you to connect two devices to spray lances. Installation on a high-pressure output. | • |

- The scope of supply.
- Available accessories.
- Extension hose.

1.151-900.0



| | catalog number | Flow rate | nozzle size | | Price | Description |
|--|----------------|---------------|-------------|--------|-------|---|
| Adapter for cleaning flat surfaces 30 FRV | | | | | | |
| Strip for collecting FRV | 1 2,642-910.0 | | | | | The rubber strip harvesting the FRV 30. For use on smooth floors in rooms. It minimizes the amount of water remaining on the surface after cleaning. |
| Extension hose 5 m to snap floor washing and the flat surface (FRV 30) | 2 4,440-939.0 | | | | | FRV suction hose 30, extending, 5 m and includes the adapter. • |
| Mounting kit fixing a hose | 3 2,642-528.0 | | | | | • |
| Montażowy- strainer set | 4 2,642-532.0 | | | | | • |
| FRV 30 | 5 2,111-010.0 | | | | | • |
| Adapter for cleaning flat surfaces 30 FR | | | | | | |
| FR 30 | 6 2,111-011.0 | | | 300 mm | | • |
| Adapter for cleaning flat surfaces 30 FR Me | | | | | | |
| FR 30 Me | 7 2,111-013.0 | | | 300 mm | | For washing the surface of flat walls, doors, garage doors. A rotating set of nozzles and the beam power gain performance of a surface which is up to 10 times greater than conventional methods. Made of stainless steel, ceramic bearings, integrated connection for suction. • |
| Adapter for cleaning flat surfaces 50 FR | | | | | | |
| A device for cleaning flat surfaces 50 FR | 8 2,111-023.0 | | | 500 mm | | A rotating nozzle beam power it gives a yield 10 times greater than conventional methods. Made of stainless steel. Ceramic bearings equipped with a mechanism for sucking the cleaning agent valve and an integrated cleaning agent. Diameter of 500 mm. • |
| Nozzle sets for starters FR | | | | | | |
| A set of nozzles FR | 9 2,639-187.0 | 650-850 l / h | | | | Zestw nozzles 30 FR, 30 FR ME, FR 50 designed for high pressure Kärcher flow of pumping at: 650-850 l / h • |
| Nozzle sets for starters FRV 30 | | | | | | |
| Set of nozzles 040 - for FRV 30 | 10 2,642-431.0 | | 40 | | | • |
| Adapter for cleaning flat surfaces 30 FRV Me | | | | | | |
| Suction hose 30 FRV Me | 11 4,441-040.0 | | | | | • |
| FRV 30 ME | 12 2,111-012.0 | | | | | • |
| Adapter for cleaning flat surfaces 50 FR Me | | | | | | |
| FRV 50 ME | 13 2,111-024.0 | | | | | • |

• The scope of supply. • Available accessories. • Extension hose.



| | | catalog number | | | | | | Price | Description | |
|--|----|----------------|--|--|--|--|--|-------|---|---|
| connector nozzles | | | | | | | | | | |
| TR safety component only exchanges | 1 | 4.112-011.0 | | | | | | | | • |
| rotary joint | | | | | | | | | | |
| rotary joint | 2 | 4.111-021.0 | | | | | | | Effectively prevents twisting high-pressure hose, connection M 22 x 1.5 m. The protection of the handle. | • |
| Connector | | | | | | | | | | |
| Hose Connector 2xM22x1.5 with rubber cover | 3 | 4.111-037.0 | | | | | | | To connect and extend the HP hoses. 2xM22x1.5 connection, brass with rubber cover. | • |
| Adapter for attaching nozzles / accessories | | | | | | | | | | |
| Adapter | 4 | 4.111-022.0 | | | | | | | For fixing the nozzle wysokociśnieniowej and items of equipment directly on the high pressure gun (with thread as in the nozzle) - x M 1 x 22 | • |
| Screw union | 5 | 4.111-038.0 | | | | | | | 1.5 / 1 M 18 x 1.5. | • |
| Adapter EASY! Lock | | | | | | | | | | |
| M22AG-1 adapter TR22AG | 6 | 4.111-029.0 | | | | | | | | • |
| Adapter 2 M 22 x 1.5 IG EASY! Lock | 7 | 4.111-030.0 | | | | | | | Adapter M 22 x 1.5 lets you freely combine the old with the new - EASY! Lock. It has a two-color and embossed number. | • |
| Adapter 3-M22IG TR22AG | 8 | 4.111-031.0 | | | | | | | | • |
| M22 adapter - Rotary | 9 | 4.111-032.0 | | | | | | | Adapter M22 - rotating. For use with high-pressure hose extension with AVS connection or with telescopic lance with high-pressure hose with AVS connection. | • |
| Adapter 5-TR22IG M22AG | 10 | 4.111-033.0 | | | | | | | | • |
| Adapter 6-TR22IG M22AG | 11 | 4.111-034.0 | | | | | | | | • |
| Adapter 7-M18IG TR20AG | 12 | 4.111-035.0 | | | | | | | | • |
| Adapter 8-TR20IG M18AG | 13 | 4.111-036.0 | | | | | | | | • |
| Adapter to replace TR22IGM22AG Ersatz | 14 | 4.111-046.0 | | | | | | | | • |
| Injector cleaners | | | | | | | | | | |
| Injector complete HD 7 / 18-4M / HDS 8 / 18-4C | 15 | 6.645-759.0 | | | | | | | | • |
| Add-on kit Proportioning valve | 16 | 6.500-000.0 | | | | | | | | • |
| Injector cleaning (without the nozzles) | 17 | 4.637-032.0 | | | | | | | Dosed cleaning agent into a stream of water at high pressure or low pressure independently | • |
| High pressure detergent injector | 18 | 4.637-033.0 | | | | | | | Allows administration injector detergent under high pressure. Possible to adjust the concentration of the working range up to 5%. | • |
| Arming to No. 3.637-170 | | | | | | | | | | |
| The contribution of the nozzle trapezoidal thread HD-GER.500-7 | 19 | 4.769-005.0 | | | | | | | | • |
| Injector cleaner nr. 3.637-001.0 | | | | | | | | | | |
| Injector cleaner nr. 3.637-001.0 | 20 | 4.769-003.0 | | | | | | | High pressure devices to 1100 l / h. | • |
| | 21 | 4.769-001.0 | | | | | | | Low pressure devices to 1100 l / h. | • |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C

1.151-900.0



| | catalog number | Operating pressure max. | nozzle size | | Price | Description |
|---|----------------|-------------------------|-------------|-------|-------|--|
| The cleaning barrels | | | | | | |
| | 1 2.112-020.0 | | | | | |
| Pipe cleaning hose, ID 6 | | | | | | |
| Hose line TR tube cleaning is DN6 | 2 6.110-046.0 | 250 bar | | | | |
| Cleaning hose pipes ID 6, 20 m 3 6.110-008.0 | | 250 bar | | | | Very flexible hose for cleaning pipes (1/8" connection for the die.) Maximum pressure 250 bar. |
| Hose line TR tube cleaning is DN6 | 4 6.110-047.0 | 250 bar | | | | |
| Pipe cleaning nozzle | | | | | | |
| Rotary nozzle tube cleaning D21 / 040 | 5 4.765-001.0 | | 40 | 21 mm | | |
| Rotary nozzle tube cleaning D30 / 040 | 6 4.765-004.0 | | 40 | 30 mm | | |
| Pipe cleaning nozzle size 55, Ø 16 mm | 7 5.763-015.0 | | 55 | 16 mm | | With internal thread R 1/8" for cleaning clogged drains and the pipe, the streams 3 x 30° inclined to the rear, diameter 16 mm. |
| Pipe cleaning nozzle size 65, Ø 16 mm | 8 5.763-020.0 | | 65 | 16 mm | | With internal thread R 1/8", for cleaning clogged drains and the pipe, one stream in the front, streams of 3 x 30° inclined to the rear, diameter 16 mm. |
| Pipe cleaning nozzle size 50, 30 mm | 9 5.763-017.0 | | 50 | 30 mm | | With internal thread R 1/8", for cleaning clogged drains and the pipe, the streams 3 x 30° inclined to the rear, diameter 30 mm. |
| Rotary nozzle for cleaning pipes, size 50, diameter 16 mm | 10 6.415-428.0 | | 50 | 16 mm | | With internal thread R 1/8", for cleaning clogged drains and the pipe 4 flows rotational, diameter 16 mm. |
| Pipe cleaning nozzle 25 D / 040 | 11 6.415-944.0 | | 40 | 25 mm | | R 1/8 threaded connection for mounting on the high pressure hose to clean the pipes. 1 x forwards 3 x 30° to the rear. |
| Pipe cleaning nozzle 30 D / 040 | 12 6.415-946.0 | | 40 | 30 mm | | |
| Pipe cleaning nozzle 35 D / 040 | 13 6.415-948.0 | | 40 | 35 mm | | |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | catalog number | nozzle size | | | | | Price | Description | |
|--|----------------|-------------|--|--|--|--|-------|---|---|
| Pressure nozzles 0 ° | | | | | | | | | |
| Nozzle HP 0 °, the size of 40 | 1 2.113-001.0 | 40 | | | | | | HP nozzle to 0 °. Pencil jet for particularly strongly hardened dirt. Nozzle size 40. | • |
| Power nozzle 15 ° | | | | | | | | | |
| Power nozzle 15 °, the size of the nozzle 40 | 2 2.113-045.0 | 40 | | | | | | The nozzle spray angle of 15 °. Flat spray having an average performance of the surface to remove stubborn stains. | • |
| Power nozzles 25 ° | | | | | | | | | |
| Power nozzle 25 °, the size of the nozzle 40 | 3 2.113-021.0 | 40 | | | | | | The nozzle spray angle of 25 °. Flat spray high-pressure high efficiency and good surface strength of loosening the dirt. | • |
| Power nozzle 40 ° | | | | | | | | | |
| Power nozzle 40 ° | 4 2.113-003.0 | 40 | | | | | | Flat spray high-performance surface - suitable for delicate surfaces. Nozzle size 40. | • |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C

1.151-900.0



MISSING PICTURE: M:\print\2112019_std_02_103740_acc.tif



| | | catalog number | nozzle size | | | | | Price | Description |
|--|---|----------------|-------------|--|--|--|--|-------|---|
| Kit for blasting a stream of water (without nozzles) | | | | | | | | | |
| Sanding device a stream of water of adjustable flow rate (without nozzles) | 1 | 4.115-000.0 | | | | | | | Addition of an abrasive water jet under high pressure. For removing paint, rust, scale. Installation of the lance in place of the nozzle. With abrasive flow control. |
| Device for blasting a stream of water without adjusting the flow (without the nozzles) | 2 | 4.115-006.0 | | | | | | | Addition of an abrasive water jet under high pressure. For removing paint, rust, scale. Installation of the lance in place of the nozzle. Without adjusting the flow of abrasive. |
| Nozzles for wet sanding | | | | | | | | | |
| TR set of nozzles for spraying set for | 3 | 2.112-019.0 | 40 | | | | | | |
| The nozzles of boron carbide | | | | | | | | | |
| The nozzle of boron carbide, size 6 mm | 4 | 6.415-084.0 | 6 mm | | | | | | In addition to the nozzle packages. Extremely resistant to abrasion, for continuous operation. |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | | catalog number | Flow rate | | | | Price | Description | |
|---|---|----------------|----------------|--|--|--|-------|---|---|
| lance pianująca | | | | | | | | | |
| Foam lance TR | 1 | 4.112-055.0 | 900-2500 l / h | | | | | | • |
| lance foam | 2 | 2.112-017.0 | | | | | | Short, handy foaming lance 1-liter reservoir cleaner. Swivel connector M 22 x 1.5. Dosing a cleaning agent directly on the lance. | • |
| Gray tank only to exchange 1L | 3 | 6.414-050.0 | | | | | | | • |
| Inno foam kit | | | | | | | | | |
| Set Inno foam injector 4 | 2 | 2.112-000.0 | | | | | | The high-pressure foam cleaning systems for use with mobile and stationary HD / HDS to clean and disinfect. | • |
| Easy foam set | | | | | | | | | |
| Easy set foam injector | 5 | 2.112-010.0 | | | | | | The high-pressure foam cleaning systems for use with mobile and stationary HD / HDS to clean and disinfect. | • |
| Sets of sets of foam nozzles for Inno / Easy | | | | | | | | | |
| Nozzle 60 sets of foam Inno / Easy | 6 | 2.111-018.0 | 600-700 l / h | | | | | Flow rate: 600 l / h-700 l / h. Optimized for devices with different capacity for economic operation. | • |
| Foam nozzle kit | | | | | | | | | |
| Foam nozzle kit | 7 | 2.112-013.0 | | | | | | To apply the mixture of foaming agent in the area of sanitary and foodstuff where it is necessary to long duration of action. | • |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0




| | catalog number | Length | | | | Price | Description | |
|---|----------------|--------|--|--|--|-------|---|---|
| Automatically rolled hose reels | | | | | | | | |
| Automatically retractable hose reel (painted steel) | 1 6.392-074.0 | 20 m | | | | | Made of powder-coated steel and plastic. | • |
| Automatically retractable hose reel (stainless steel) | 2 6.392-083.0 | 20 m | | | | | Made of stainless steel and plastic. | • |
| Automatic hose reel HP | 3 6.392-106.0 | 20 m | | | | | For wall mounting, with handle (stainless steel) without high pressure hose in the package. For safe storage of the hose, easy winding and unwinding. | • |
| Add-on kit hose reel lacquered basaltgra | 4 6.392-105.0 | 20 m | | | | | | • |
| Hose reel | 5 6.392-076.0 | 20 m | | | | | The drum with handle (stainless steel). | • |
| Automatic high-pressure hose | 6 6.392-122.0 | 20 m | | | | | Automatic high-pressure hose made of stainless steel. The maximum capacity of 20 m. | • |
| Mounting kit hose drum TR 40m | 7 6.392-442.0 | 40 m | | | | | | • |
| Kit for mounting the drum wall | 8 2.639-931.0 | | | | | | Kit for mounting the drum wall. | • |
| Swivel bracket for wall mounting | 9 2.641-867.0 | | | | | | For use with an automatic high-pressure hose drum 2.641-866.0 | • |

• The scope of supply. • Available accessories. • Extension hose.

ACCESSORIES FOR HD 7/18 C

1.151-900.0

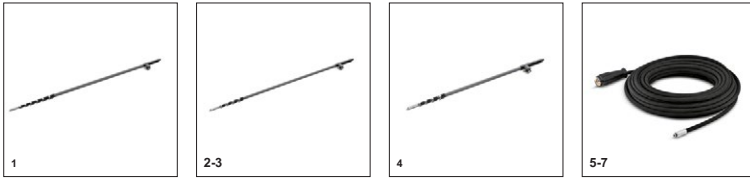

| | catalog number | Flow rate | Water feed temperature | Length | Price | Description |
|--|----------------|-----------|------------------------|--------|-------|--|
| Cleaning solar panels - a lance handler | | | | | | |
| Lance handler ISOLAR TL 14 C | 1 4.110-002.0 | | 60 ° C | | | Telescopic lance of the variable length adjustment is made exclusively of a composite carbon fiber enables easy cleaning of large surfaces. Length: 2.4 m to 14 m. |
| Lance handler ISOLAR TL 10 C | 2 4.110-007.0 | | 60 ° C | | | Telescopic lance of the variable length adjustment is made exclusively of a composite carbon fiber enables easy cleaning of large surfaces. Length: 2.4 m to 10.2 m. |
| Lance handler ISOLAR TL 10 H | 3 4.110-003.0 | | 60 ° C | | | Telescopic lance of the variable length adjustment is made of composite glass fiber and carbon fiber enables easy cleaning of large surfaces. Length: 2.4 m to 10.2 m. |
| Lance handler ISOLAR TL 7 H | 4 4.110-004.0 | | 60 ° C | | | Telescopic lance of the variable length adjustment is made of composite glass fiber and carbon fiber enables easy cleaning of large surfaces. Length: 1.8 m to 7.2 m. |
| High-pressure hose to the lance ISOLAR TL 7 | 5 6.392-978.0 | | 155 ° C | | | High-quality, flexible hose provided for the telescopic lance Isolar TL 7. The coated rubber, which makes it easier to slip the folding and unfolding lance. |
| High-pressure hose to the lance ISOLAR TL 10 | 6 6.392-977.0 | | 155 ° C | | | High-quality, flexible hose provided for the telescopic lance Isolar TL 10. The coated rubber, which makes it easier to slip the folding and unfolding lance. |
| High-pressure hose to the lance ISOLAR TL 14 | 7 6.392-976.0 | | 155 ° C | | | High-quality, flexible hose provided for the telescopic lance Isolar TL 14 coated with rubber, which makes it easier to slip the folding and unfolding lance. |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | catalog number | Flow rate | | | | Price | Description |
|--------------------------------|----------------|---------------|--|--|--|-------|--|
| Mounted washing brush | | | | | | | |
| Mounted washing brush | 1 4.762-497.0 | | | | | | Fastening clamp, two or three-stage nozzles. Suitable for the new models of the two nozzles and the three- |
| Mounted wash brush, M 18 x 1.5 | 2 4.113-001.0 | | | | | | For universal use for cleaning the surface. Fastening with the terminal directly on the lance. Connector M 18 x 1.5. |
| Rotary washing brush | | | | | | | |
| Washing rotary brush | 3 4.113-004.0 | 500-800 l / h | | | | | |
| The rotary brush 500-800 l / h | 4 4.113-003.0 | 500-800 l / h | | | | | Propelled by water jet. To gently remove dust and gray film from all surfaces. Resistant to temperatures up to 60 ° C (cartridge brushing exchangeable). |

- The scope of supply.
- Available accessories.
- Extension hose.

ACCESSORIES FOR HD 7/18 C
1.151-900.0



| | catalog number | Length | Diameter | Price | Description | |
|---|----------------|--------|----------|-------|---|---|
| Geka connector | | | | | | |
| Geka coupling 1/2" | 1 6.388-461.0 | | | | insert the hose | • |
| Geka coupling 3/4" | 2 6.388-455.0 | | | | | • |
| Geka coupling 1" | 3 6.388-465.0 | | | | the hose sleeve | • |
| Geka coupling | 4 6.388-473.0 | | | | with internal thread | • |
| suction filter | | | | | | |
| water filter | 5 6.414-956.0 | | | | | • |
| Suction filter with check valve 6 4.730-012.0 | | | | | Suction filter with brass check valve connection 1". | • |
| water filter | | | | | | |
| Mounting kit universal water filter | 7 2.637-020.0 | | | | | • |
| The exact water filter and adapter | 8 4.730-102.0 | | | | Mounted on the input device 125 .mu.m, with the adapter R 3/4" / 1". | • |
| The water supply hose | | | | | | |
| The water inlet hose, ID 13 | 9 4.440-038.0 | 7.5 m | | | ID13 R1" / R 3/4" - 30 ° C | • |
| The water supply hose | 10 4.440-207.0 | 7.5 m | | | ID 19 R 1 1/2" R 3/4", 85 ° C, suction copper reinforcement earthed. The length of 7.5m. | • |
| Check valve | | | | | | |
| Check valve 1" / 3/4" | 11 2.641-374.0 | | | | Prevents cleaner drinking water network, resistant to temperatures up to 80 ° C, integrated protection against leakage. | • |

• The scope of supply. • Available accessories. • Extension hose.