

Single phase full size 180A MIG/MAG welding unit. Ideal for general workshop use. Perfectly suited for non intensive work for assembly, repair maintain steel, stainless steel or aluminium section or sheet. Easy to use intuitive « SMART » control panel.

MIG PROCESSES: 2 IN 1

GAS Ø 0.6 - 1mm wire.

NO GAS For outdoor welding with a Ø 0.9 – 1.2mm wire.
kit no gaz (041240)

PROFESSIONAL ACCESSORIES

- Supplied with 150A torch (length 3m).Euro torch connection for easy wire and liner change.
- Powerful 40W motor for a smooth and constant wire speed.
- For use with AE 200mm (5kg) and 300 mm (15kg) wire reel.

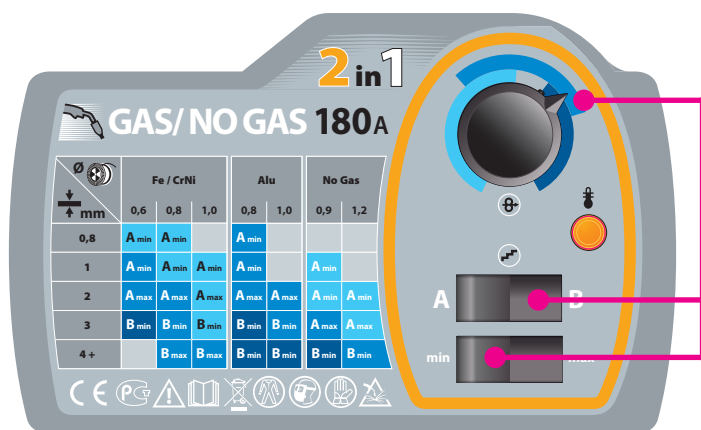
ENERGY EFFICIENT AND CONVENIENT

- Low current consumption, pluggable on a single 230V – 16A socket, (13A in UK)
- It can be used on a 6KVA generator.

SMART CONTROL PANEL

Ideal settings are indicated, just select the type and diameter of wire used, then the thickness of the metal.

The SMART control panel makes it easy to set the voltage (4 positions) and the wire speed.



Adjust your welding parameters in few seconds with the intuitive settings.



Included :
- 1 torch 150 A (3m)
- Earth clamp (3m)

ACCESSORIES















Torch MB15 kit (150A) (Not included)



Ref. 041226

Composition:

- Contact tips:
 - Ø0.6 M6 steel/stainless (x 5)
 - Ø0.8 M6 steel/stainless (x 5)
 - Ø0.8 M6 Alu (x 5)
- Contact tips supports 150A (x 3)
- Springs for nozzle (x 5)
- Nozzles 150A (x 3)

															
50/60hz	16A	min▷max	GAS	NO GAS	100	200	300	Electronic Control	0.6/0.8	0.8	80A	X% (Iz max)	U ₀	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
230V 1~	16A	35-180A	0.6 - 1.0	0.9 - 1.2	-	✓	✓		0.6/0.8	0.8	80A	140A 15%	28V ▼ 45V	39x80x70 / 46	6 kVA