

# T5545B 2S PLUS

## REFINED SYSTEM SUPREME VALUE

Designed around a low-profile cabinet that allows technicians to work on a wide variety of tyre types, the John Bean® T5545B 2S Plus makes it easier than ever to load heavy tyres.

Quickly break beads on all tyre types with the ergonomically located pedal-controlled on-floor bead breaker. Proven tilt-tower design provides maximum clearance, while the exclusive PROspeed™ system automatically measures torque and manages speed during crucial tyre-changing operations. Mounting and demounting is quick and seamless with our pneumatic bead assist system that includes a three-piece design for simple single-operator use.

Self-centring jaws with three manual adjustment positions securely clamp the wheel with the proper setup range, while a top-side bead seater quickly sets the bead with a blast of compressed air.

Certified by WDK, the T5545B 2S Plus tyre changer is ready to boost your shop's productivity day after day.



## TILT-TOWER TYRE CHANGER



### TILT-TOWER

The pneumatic Tilt-Tower post provides maximum clearance for installing the tyre on the turntable.



### "PLUS" CONFIGURATION

Certified by WDK, the "Plus" models are equipped with Pneumatic Bead Assist and the "Plus" Accessories Kit to enable the correct mounting and demounting of UHP and run-flat tyres.



### PROspeed™

The innovative self-adjusting technology provides the optimum torque and maximises the rotation speed for safe, efficient operation.



### TOP-SIDE BEAD SEATER

This ergonomic hand-held nozzle injects a high-speed blast of air into the tyre to raise the bead and seal the tyre to the rim.

*WHEN GOOD ENOUGH ISN'T ENOUGH, JB.*

**JohnBean**

# T5545B 2S PLUS

## TOOL BOX WITH INTEGRATED AIR PRESSURE GAUGE

The tool box provides a fixed storage area with four convenient shelves for tools, valves, and accessories, with an integrated air pressure gauge.

## ADJUSTABLE CLAMPING JAWS

Self-centring nylon-covered clamping jaws protect the wheel and provide a secure grip.

## LOW-PROFILE CABINET


The lower cabinet height provides increased ergonomics when working with large wheels; the operator handles the bead lever at a lower height and is able to apply more force, reducing effort handling heavy tyres. The lower cabinet also makes it possible to increase the tyre changer capacity to 15-inch tyres instead of the 13-inch tyre width on a standard cabinet.

## PNEUMATIC BEAD ASSIST

Our three-piece Pneumatic Bead Assist features a top roller, pressing foot, and lifting disk, to make it simple for a single technician to mount and demount low-profile and high-performance tyres.

## ON-FLOOR BEAD BREAKER (PEDAL-OPERATED)

Traditional side-shovel bead breaker with ergonomic pedal-control positioned away from the shovel; the fastest solution for standard, soft sidewall, and high-aspect tyres.

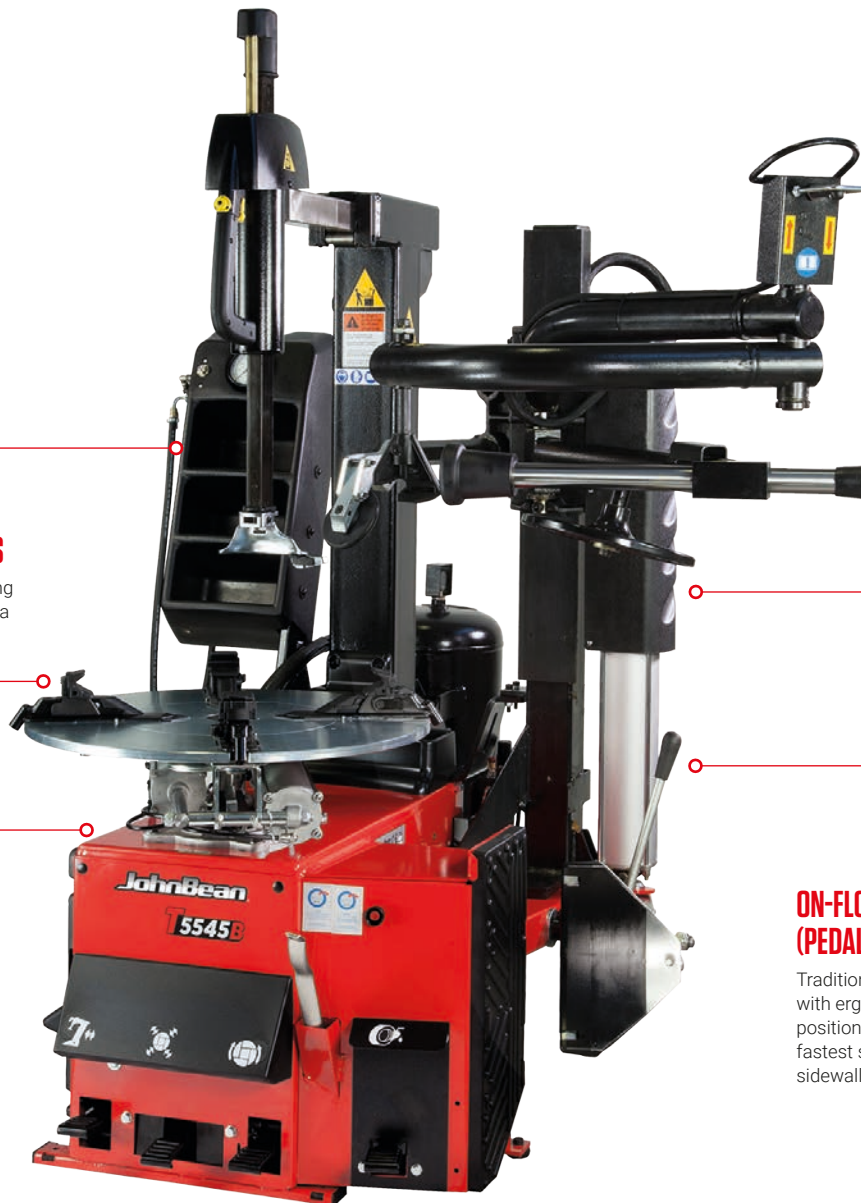

## TECHNICAL SPECIFICATIONS

Max Rim Diameter	24"   61cm
Max Tyre Width	15"   38cm
Max Wheel Diameter	39"   100cm
Power Supply	230V 1ph 50-60Hz 16A
Air Pressure Required	116-174 PSI   8-12 bar
Dimensions HxWxD	64"x66"x76"   162x169x192cm

## STANDARD ACCESSORIES

- Wave Lever Plus
- Wave Lever Plus Protector
- 5 kg Lube Bucket Holder
- Lube Brush
- Plastic Protectors for Mounting Head
- Jaw Protectors - Front & Rear
- Plastic Tyre Protector
- Rim Protection and String
- Bead Breaker Blade Protector
- "Plus" Kit

## OPTIONAL ACCESSORIES

- Quick Exchange Device with Mounting Head
- Bead Breaker Blade for Off-Road Wheels
- Wheel Lift
- MH Tractor Kit
- 4" Jaws Adaptors for Centre Type Sliding Jaws
- Light Truck Adaptor for Centre Type Sliding Jaws
- 8" Motorcycle and ATV Adaptors for Centre-type Sliding Jaws

FIND A DISTRIBUTOR



AUSTRIA  
+43 2641 24 5 24

FRANCE  
+33 134 48 58 78

GERMANY  
+49 8634 622 0

ITALY  
+39 0522 733 411

Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers, and tyre shops, thanks to the specific solutions provided by its portfolio of premium brands. John Bean is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2023 Snap-on Incorporated. John Bean is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssw22277a (EU en) 06/2023

