

   **Professional battery tester with ultra-precise measurement, intuitive colour display, and built-in printer.**

COMPREHENSIVE TESTING FUNCTIONALITY



6 and 12 V Battery Test:

- Voltage and state-of-charge test.



6 and 12 V Starter:

- Start-up voltage test.



6, 12 and 24 V alternator:






- No-load and under-load voltage test, and under-load current ripple test.

VERSATILE

Compatible with 3 types of lead-acid battery, ranging from 7 to 240 Ah:

- Sealed batteries VRLA / GEL / AGM FLAT PLATE / AGM SPIRAL
- STANDARD LIQUID batteries
- START / STOP batteries (EFB/AGM)

Working specifications:

FR	DIN	SAE	JIS	IEC	CA/MCA
				 international standard	marine battery
10 > 2000 A	10 > 1400 A	10 > 2000 A	26A17 > 245H2	10 > 1400 A	10 > 2000 A


HIGHLY ACCURATE

- Automatic external temperature compensation.
- Dynamic resistance measurement minimises battery discharge and gives a reliable result that is not influenced by:
 - surface charge
 - parasitic load (lights, various indicators, etc)
 - contact problems (terminal oxidisation, loose terminal lugs)

INTUITIVE & SAFE




- 3.2-inch colour LCD display.
- Result available in less than 1 second.
- Follow up with a new test straight away.
- Stores the results of the last test performed.
- Reverse polarity protection.

 Download the application to your PC for additional functionality: print the most recent tests, update the tester



Interface available in 13 languages

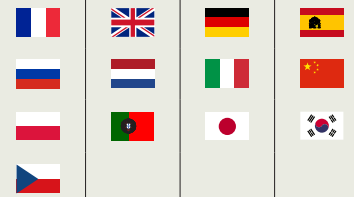

Supplied with carrying case



Detachable cables



USB cable



2 rolls of paper (ref. 056633)

Battery		TEST			RESULT	TEMPERATURE COMPENSATION	Dimensions	Weight	Length
Battery A	Battery V	CHARGING & STARTING SYSTEM VEHICLE							
6-12 V	7 > 240 Ah	• min 3 V	6 V 12 V 24 V	1 s	instant	•	10,5 x 5 x 26 cm	2 kg	2,6 m