

Gysflash 100-12 HF is a 100A high power stabilised supply incorporating Inverter technology with 5 functions :

- **Battery support:** sustains 12V (liquid or gel) automotive battery during diagnostic work
- **Advance battery charger:** ensures an ideal charging cycle for battery maintenance for the most modern vehicle
- **Showroom mode:** maintains batteries in showroom vehicles
- **In «battery change» mode,** will maintain electrical supply to preserve vehicle memory settings
- **High power stabilised supply:** voltage & current adjustable

5 Modes

- Charge
- Diagnostic
- Showroom
- Change battery
- Power Supply

Advanced features

- Automatic restart
- Cable test and calibration
- Showroom mode lock
- "Easy charge" mode
- Activate and adjust an "expert" charging curve
- Automatic SOS recovery for sulphated battery



Intuitive interface

19 Languages available

Slim size

The height of the charger (<11cm) enables to place it under vehicle.

Cables

- Fitted with 2x2.5m - 16mm² cables
- It can be fitted with 2x8m - 16mm² and more. The calibration is automatic.

TECHNOLOGY

High duty cycle
93%

15% more energy




No external ventilation
=
No dust ingress



Inverter - This technology enables :

- A better duty cycle for a light weight (6.1 kg).
- Shock and vibration absorbing feet.

FEATURES

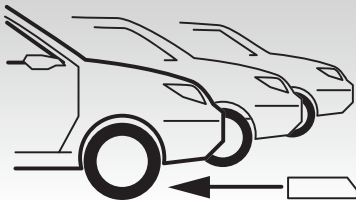

Showroom Mode and reduced dimensions:

- Slim height (< 11 cm): to enable placement under vehicle.
- Showroom mode lock: to avoid mishandling ideal for garages and showrooms.
- Automatic restart: will automatically resume the mode from last position in case of power failure.

CE - EN 60335-2-29

50/60 Hz	1500 W	I _{charge} 100 A	40°C @100%	25°C @100%	12V	MIN. MAX. Ah 20-1200 Ah	Charging Curve IU ₀ I ₀ U	BSU			Change Battery 12,9V	125A	IP 21	32 x 29.2 x 10.5 cm	6.1 kg
								Diag 13,5V	Diag+ 12>14,8V	Showroom					
220-240 V AC	1500 W	100 A	66 A	75 A	12V	20-1200 Ah	IU ₀ I ₀ U	Diag 13,5V	Diag+ 12>14,8V	Showroom	12,9V	125A	IP 21	32 x 29.2 x 10.5	6.1